


EDRJW - ADDING & ERASING TRANSMITTERS

Adding a Transmitter(s)

- 1) Release the outer housing of the EDRJW by prying in on the lock tabs on the side of the housing. You do not have to remove the PCB completely, just enough to expose the Transmitter Learn Button” found at the top middle of the PCB.
- 2) Push the “Transmitter Learn Button” once

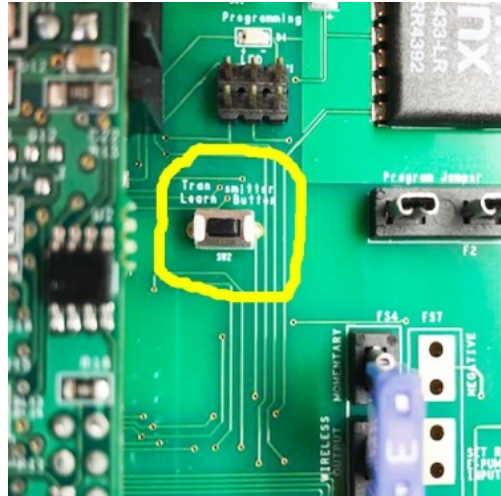

- 3) The blue TX LED will start flashing



- 4) Push any button on the transmitter once
- 5) Then push the “Transmitter Learn Button” once
- 6) The transmitter will be programmed into the receiver now. If you have more than one transmitter to add just repeat steps 1 to 4 for each of the transmitters.

Erasing Transmitter

To erase all the transmitters from the receiver

- Push and hold the “Transmitter Learn Button” down for ten seconds, the TX Light will go solid as long as the Transmitter Learn Button is pushed down. After the transmitters are cleared from the receiver the TX Light will come on for two seconds and go out which indicates that the receiver memory has been cleared.